


Usage Instructions


Starting your Chiller



a -Unscrew the 2 screws of the compartment 1 to free the cryogenic pocket

b - Remove the pocket and the metallic support as indicated in fig 1

Fig.1




a - pour the content of the 1st container into the reserve

b -Fill the container with 5 liters of water and pour into the reserve

c - Repeat the above with the 2 remaining containers

Fig.2

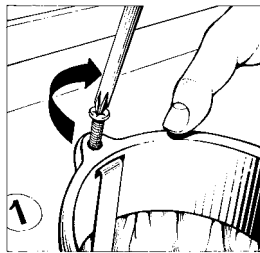


a - Replace the pocket as indicated in fig 3


Important : Do not screw the screws too tightly as this could damage the support

Fig.3


Using your Chiller

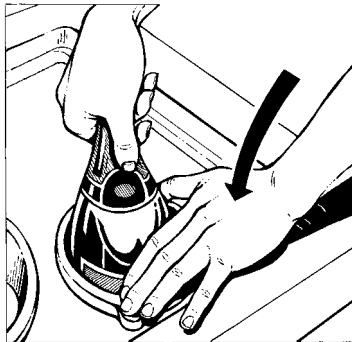

Insert the bottle, can, etc...in the suitable compartment, and push to the button

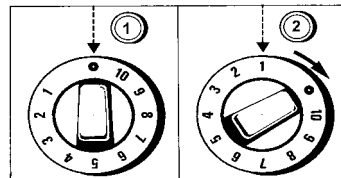


Turn the timer to the number of minutes required.

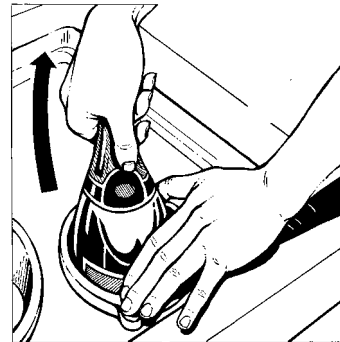


When time is up, a button lights up and a buzzer rings
a - Stop the buzzer by pressing the lighted button

b - First give a 90° turn and remove the bottle

Maintenance

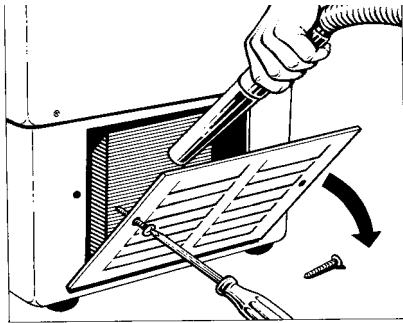


Once a month or when needed, open the grill on the right side of the bottom of the machine, and dust with a vacuum cleaner

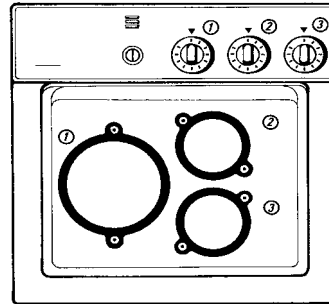


It is possible that humidity in the air leaves a little ice on the pockets, this does not minimize the performance of your Chiller. Occasionally, vacuum cleans the pockets, and wipe off any ice with clean damp cloth.

*Never put sharp or pointy objects in contact with the pockets, as this could perforate them
If a pocket has to be replaced, proceed as follows*


Replacing a pocket

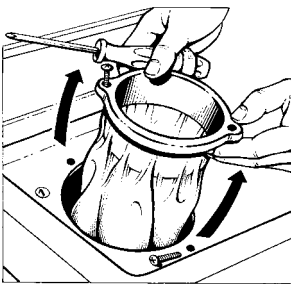

Remove the pocket to be replaced as in fig1 of "to start your Chiller"

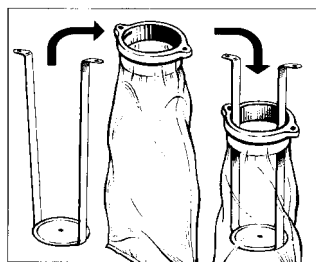

Take out the metallic support of the pocket to be replaced, then the pocket itself
Put in the new pocket with the metallic support

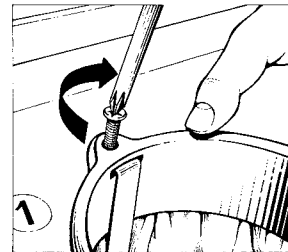

Fix the new pocket with screws as in fig.3 of "to start your Chiller"
Do not screw screws too tightly as this could damage irremedially your support